



Create an app named Problem2LastName:

The app uses the RecyclerView which contains a RecyclerView.ViewHolder and a DataAdapter to display originally a list of 2 fragments. Each Fragment displays a UUID.

Upon clicking on any of the existing fragments of the RecyclerView, a new fragment that has a new UUID is added to the RecyclerView and displayed in the RecyclerView.

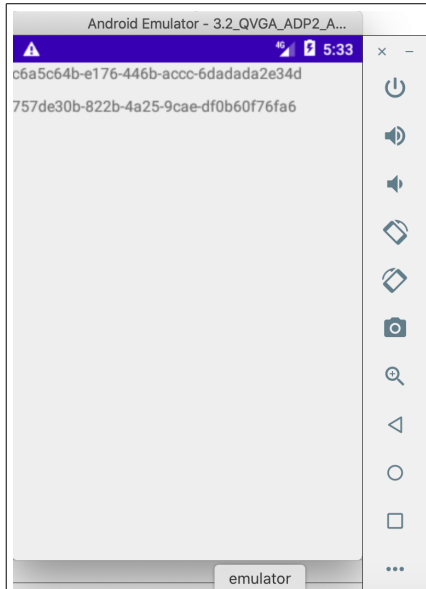

**Figure 1**  
RecyclerView initially

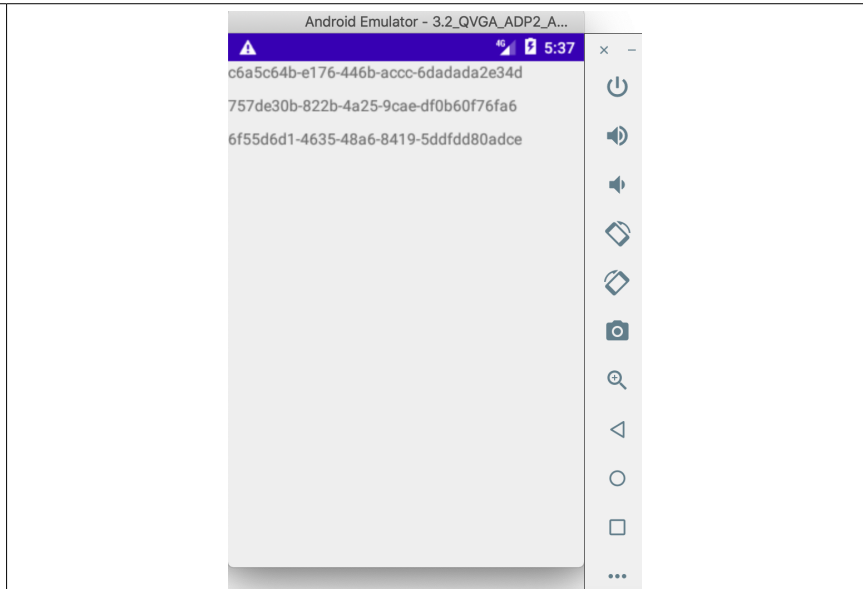

**Figure 2**  
RecyclerView after clicking any of the UUIDs of Figure 1